

Line Speed Capability

- 1 line 5x5 @ 210 mpm \ 688 fpm
- 1 line 7x5 @ 170 mpm \ 557 fpm
- 2 lines 7x5 @ 72 mpm \ 236 fpm
- 3 lines 7x5 @ 39 mpm \ 128 fpm
- 4 lines 7x5 @ 22 mpm \ 732 fpm

Font Matrix Configuration

- Single-line: 5x5, 7x5, 9x7, 11x7, 15x11, 23x15, 32x24
- Twin-line: 5x5, 7x5, 9x7, 11x7, 15x11
- Tri-line: 5x5, 7x5, 9x7
- Quad-line: 5x5, 7x5

Linear Bar Codes

- Code39, Code128, EAN128, EAN-8, EAN-13, UPC-A&E, QR code, DataMatrix

Character Height

- Selectable from 0.1 cm (0.04") to 2 cm (0.8"), depending on font


Throw Distance

- Optimal: 15 mm (0.6")
- Range: 0.5 mm (0.2") to 50 mm (2")

Display & Key-in

- 7" 800X640 Full HD touch screen
- WYSIWYG on-screen message editing, Unix smart OS with iPhone-level user experience

Dimensions

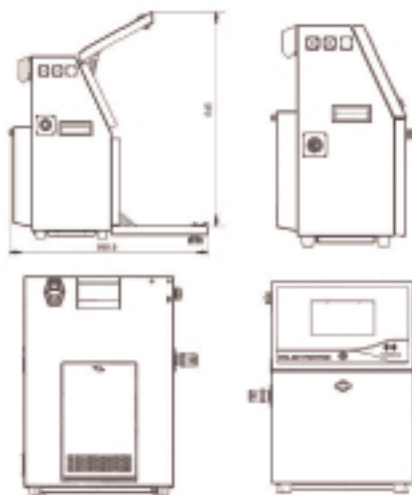

Custom Logo/Graphics

- Can be created by user on build-in logo editor on printer, or on PC by Microsoft Paint.

Character Sets

- English, Chinese, Arabic, Farsi, Latin, Russian, etc

Language and Interface Options

- English, Chinese(S+T), Arabic, Vietnamese, Thai, Farsi, French, German, Korean, Spanish, etc

Message Storage

- 1000 complex messages.

Fluid Containers

- 1500ml refillable reservoir (Ink/Solvent)

Temperature/Humidity Range

- 5°C (41°F) to 45°C (113°F)
- 0% to 90% RH non-condensing

Electrical Requirements

- Power supply 100-120/ 200-240 VAC, 50/60Hz, 120W

Net Weight

- Unpacked and dry: 27 kg (59.5 lbs)

Environmental Protection

- 304 stainless steel, IP54 standard, no plant air required

Print Head Umbilical

- 2.5 meters standard, up to 5 meters

Options

- Remote control software kit (Win10), RJ45 or Wi-Fi
- Food grade version
- Wide range of accessories (Sensors/Encoders/etc)

Phone No : +91 98802 11666

+91 76767 21986

Mail : info@hanuja.net

Website : www.hanjuja.net

Address : No.107, 1st floor, Brindavan Arcade,
13th Cross, Balaji Layout,
Near Sri Krishna Hardware,
Mallathahalli, Bangalore-560056



HANUJA
TECHNOLOGIES
Be a part of Right Choice